

'SoundPro 48'

Product overview:

Australian Architectural Fire Doors have developed the tested & approved 'SoundPro' acoustic door range. Specifically designed & engineered to minimize or block the transmission of sound & vibration between spaces. SoundPro Door Systems are;

- Manufactured locally in QLD under ISO 9001 Quality Standards
- Tested to Australian Standards ISO 354-2006 & AS 2107-2000
- Available in a variety of RW (weighted sound reduction) ratings

Door Details:

Product	RW	Weight	Size	Thick	Perimeter Seal	Meeting Stile Seal	Drop Seal	Threshold Plate	Frame	Test Reference
SoundPro 48 - Single	RW48	47.3kg/m ²	2100 x 920	73mm	IS0511 IS7087si	N/A	IS8011si IS8520si	Flat	2mm Steel Frame,	AC-PR134A-JPJ-01 Test AC400DR PKA100AFD R03
SoundPro 48 - Double	RW47	47.3kg/m ²	2100 x 920 2100 x 920	73mm	IS0511 IS7087si	IS7061 (2-off)	IS8011si IS8520si	Flat	plaster filled	PKA100AFD R03

Sizes:

Single: 2100 x 920 x 73

Pair: 2100 x 920/920 x 73

Further sizes available upon request. Please contact your AAFD representative.

Finish Options:

- Ply or MDF
- Laminate – Antibacterial
- STD
- HPL
- Veneer
- Metal (mild steel, aluminium, colour bond)

Frame:

Pressed metal frame

2mm Mild Steel & Stainless Steel

Up to 400mm material girth

Frame fixings

100 x 75 x 3mm ball bearing hinges

Supplied standard with plasterboard backfilling to partition frames only


Seals:

Acoustic door sets are supplied standard with tested & approved seal combinations



'SoundPro 48'

Door Seal Combination:


Perimeter seal: IS0511

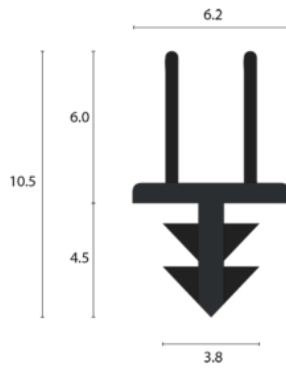


Perimeter seal: IS7087si

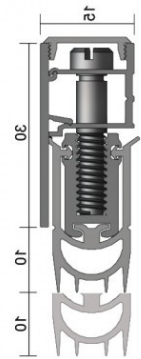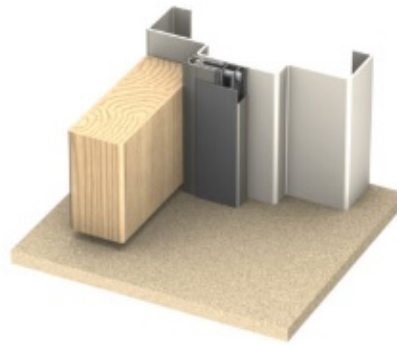

Threshold automatic drop seal: IS8520si

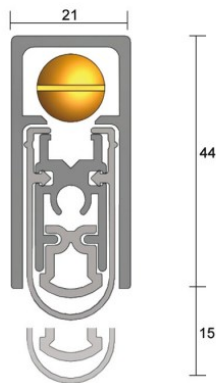

Drop seal: IS8011si

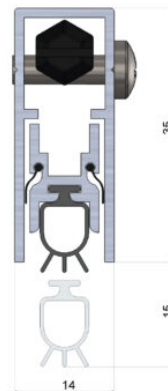

Dual leaf door meeting stile: IS7061si x 2

