

## 'SoundPro 35'

### Product overview:

Australian Architectural Fire Doors have developed the tested & approved 'Sound pro' acoustic door range. Specifically designed & engineered to minimize or block the transmission of sound & vibration between spaces. SoundPro Door Systems are:

- Manufactured locally in QLD under ISO 9001 Quality Standards
- Tested to Australian Standards ISO 354-2006 & AS 2107-2000
- Available in a variety of RW (weighted sound reduction) ratings

### Door Details:

Product	RW	Weight	Size	Thick	Perimeter Seal	Meeting stile Seal	Drop Seal	Threshold plate	Frame	Test Reference
SoundPro 35 - Single	RW35	25.5kg/m <sup>2</sup>	2100 x 1100	50mm	IS1212	N/A	IS8011si	Flat	2mm Steel	AC-PR124A-JPJ-01 Test AC337DR PKA100AFDR01
SoundPro 35 - Double	RW35	25.5kg/m <sup>2</sup>	2100 x 1100 2100 x 1100	50mm	IS1212	IS7061 (2 of)	IS8011si	Flat	Frame plaster filled	PKA100AFDR01

### Sizes:

Single: 2100 x 1100 x 50

Pair: 2100 x 1100/1100 x 50

Further sizes available upon request. Please contact your AAFD representative.

### Finish Options:

Manufacture, supply, installation, inspection, certification & maintenance of the following products:

- Ply or MDF
- Laminate – Antibacterial
- STD
- HPL
- Veneer
- Metal (mild steel, aluminium, colour bond)

### Frame:

Pressed metal frame

2mm Mild Steel & Stainless Steel

Up to 400mm material girth

Frame fixings

100 x 75 x 3mm ball bearing hinges

Supplied standard with plasterboard backfilling to partition frames only



### Seals:

Acoustic door sets are supplied standard with tested & approved seal combinations


# 'SoundPro 35'

## Door Seal Cobination:

Perimiter seal: IS1212

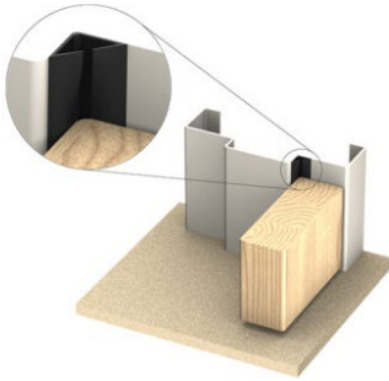

## Threshold automatic drop seal: IS8011si

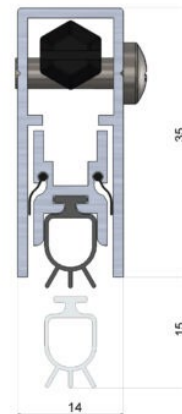

## Perimiter seal: IS1212

